


Discharge and Metering Unit Type DZR



- Bag emptying hopper with discharge aid for poor flowing and bridging solids.
- The cylindrical hopper design secures a constant product flow.
A discharge arm, rotating just above the flat hopper bottom, secures a constant fill of the feeding spiral underneath.
- As soon as the lid is opened, the ventilator starts to suck away all the dust airborne while emptying. After closing the lid, the filter will be cleaned automatically.

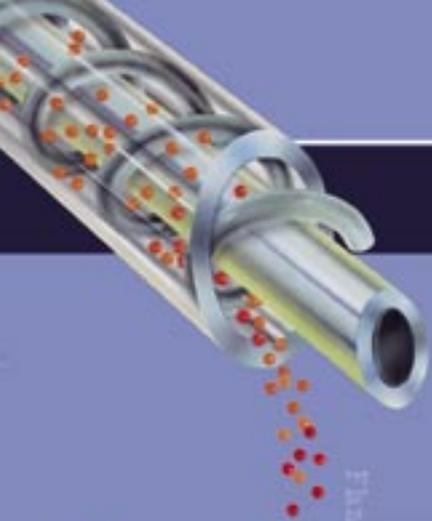

With dust hood and filter unit



- Unit available in beat blasted stainless steel or in epoxy coated carbon steel.
- Dosing capacity from 3 litres up to 15.000 litres per hour, depending of size of the metering tube and the spiral.

Transitec

ANLAGENBAU GMBH



Discharge and Metering Unit

● Container emptying station for poor flowing solids with vibration-frame



● Fitted underneath a Big Bag emptying station



● Feeder outlet type AFT, with T change over into elevating conveyor



● Feeder outlet type AFD, free falling unit



● Feeder outlet type AFP, with pneumatically quick release coupling



● Weighed bag emptying station



● Combined bag/Big Bag emptying station, movable on castor wheels